



















Cimi, Exhibition Cabinet Lighting Range.
A professional showcase light range, that can achieve precise illumination of exhibits at close range, so that close vision is not disturbed by glare. This achieves a pure exhibition environment, meeting the lighting needs of exhibitions of different sizes. Dimming can be grouped or individual dimming control is possible.






 		Code	MCD0103E-T						
		Wattage	3W						
		input Voltage	DC3V/700mA Max						
		Installation	Recessed						
		Adjustable	Horizontal360°/Vertial22°						
		Weight	0.06kg						
		Finish	YB/YW						
Remarks									
Accessory	/								
Image	/								
Code	/								
CCT	3000K								
CRI	CRI 92								
Beam	9°		16°		24°				
Lumens	106lm		110lm		132lm				
IES									
	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)
	0.5	12148	0.08	0.5	4376	0.15	0.5	2820	0.20
	1	3037	0.15	1	1094	0.29	1	705	0.40
	1.5	1350	0.23	1.5	486	0.44	1.5	313	0.60
	2	759	0.30	2	274	0.58	2	176	0.80
	2.5	486	0.38	2.5	175	0.73	2.5	113	1.00
CCT	4000K								
CRI	CRI 92								
Beam	9°		16°		24°				
Lumens	112lm		115lm		140lm				
IES									
	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)	H(m)	E(lx)	D(m)
	0.5	12524	0.08	0.5	4432	0.15	0.5	3136	0.20
	1	3037	0.15	1	1108	0.29	1	784	0.40
	1.5	1350	0.23	1.5	492	0.44	1.5	348	0.60
	2	759	0.30	2	277	0.58	2	196	0.80
	2.5	501	0.38	2.5	177	0.73	2.5	125	1.00






 		Code	MCD0103E-L																																																								
		Wattage	3W																																																								
		Input Voltage	DC3V/700mA Max																																																								
		Installation	Recessed																																																								
		Adjustable	Horizontal360°/Vertial22°																																																								
		Weight	0.06kg																																																								
		Finish	YB/YW																																																								
Remarks																																																											
Accessory	/																																																										
Image	/																																																										
Code	/																																																										
CCT	3000K																																																										
CRI	CRI 92																																																										
Beam	9°		16°		24°																																																						
Lumens	106lm		110lm		132lm																																																						
IES																																																											
	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>12148</td><td>0.08</td></tr><tr><td>1</td><td>3037</td><td>0.15</td></tr><tr><td>1.5</td><td>1350</td><td>0.23</td></tr><tr><td>2</td><td>759</td><td>0.30</td></tr><tr><td>2.5</td><td>486</td><td>0.38</td></tr></table>		H(m)	E(lx)	D(m)	0.5	12148	0.08	1	3037	0.15	1.5	1350	0.23	2	759	0.30	2.5	486	0.38	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>4376</td><td>0.15</td></tr><tr><td>1</td><td>1094</td><td>0.29</td></tr><tr><td>1.5</td><td>486</td><td>0.44</td></tr><tr><td>2</td><td>274</td><td>0.58</td></tr><tr><td>2.5</td><td>175</td><td>0.73</td></tr></table>		H(m)	E(lx)	D(m)	0.5	4376	0.15	1	1094	0.29	1.5	486	0.44	2	274	0.58	2.5	175	0.73	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>2820</td><td>0.20</td></tr><tr><td>1</td><td>705</td><td>0.40</td></tr><tr><td>1.5</td><td>313</td><td>0.60</td></tr><tr><td>2</td><td>176</td><td>0.80</td></tr><tr><td>2.5</td><td>113</td><td>1.00</td></tr></table>	H(m)	E(lx)	D(m)	0.5	2820	0.20	1	705	0.40	1.5	313	0.60	2	176	0.80	2.5	113	1.00
	H(m)	E(lx)	D(m)																																																								
	0.5	12148	0.08																																																								
	1	3037	0.15																																																								
	1.5	1350	0.23																																																								
	2	759	0.30																																																								
2.5	486	0.38																																																									
H(m)	E(lx)	D(m)																																																									
0.5	4376	0.15																																																									
1	1094	0.29																																																									
1.5	486	0.44																																																									
2	274	0.58																																																									
2.5	175	0.73																																																									
H(m)	E(lx)	D(m)																																																									
0.5	2820	0.20																																																									
1	705	0.40																																																									
1.5	313	0.60																																																									
2	176	0.80																																																									
2.5	113	1.00																																																									
CCT	4000K																																																										
CRI	CRI 92																																																										
Beam	9°		16°		24°																																																						
Lumens	112lm		115lm		140lm																																																						
IES																																																											
	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>12524</td><td>0.08</td></tr><tr><td>1</td><td>3131</td><td>0.15</td></tr><tr><td>1.5</td><td>1392</td><td>0.23</td></tr><tr><td>2</td><td>783</td><td>0.30</td></tr><tr><td>2.5</td><td>501</td><td>0.38</td></tr></table>		H(m)	E(lx)	D(m)	0.5	12524	0.08	1	3131	0.15	1.5	1392	0.23	2	783	0.30	2.5	501	0.38	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>4432</td><td>0.15</td></tr><tr><td>1</td><td>1108</td><td>0.29</td></tr><tr><td>1.5</td><td>492</td><td>0.44</td></tr><tr><td>2</td><td>277</td><td>0.58</td></tr><tr><td>2.5</td><td>177</td><td>0.73</td></tr></table>		H(m)	E(lx)	D(m)	0.5	4432	0.15	1	1108	0.29	1.5	492	0.44	2	277	0.58	2.5	177	0.73	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>3136</td><td>0.20</td></tr><tr><td>1</td><td>784</td><td>0.40</td></tr><tr><td>1.5</td><td>348</td><td>0.60</td></tr><tr><td>2</td><td>196</td><td>0.80</td></tr><tr><td>2.5</td><td>125</td><td>1.00</td></tr></table>	H(m)	E(lx)	D(m)	0.5	3136	0.20	1	784	0.40	1.5	348	0.60	2	196	0.80	2.5	125	1.00
	H(m)	E(lx)	D(m)																																																								
	0.5	12524	0.08																																																								
	1	3131	0.15																																																								
	1.5	1392	0.23																																																								
	2	783	0.30																																																								
2.5	501	0.38																																																									
H(m)	E(lx)	D(m)																																																									
0.5	4432	0.15																																																									
1	1108	0.29																																																									
1.5	492	0.44																																																									
2	277	0.58																																																									
2.5	177	0.73																																																									
H(m)	E(lx)	D(m)																																																									
0.5	3136	0.20																																																									
1	784	0.40																																																									
1.5	348	0.60																																																									
2	196	0.80																																																									
2.5	125	1.00																																																									






YB/YWYB/YW













083084






 		Code	MCD0103T-TS																																						
		Wattage	3W																																						
		Input Voltage	DC3V/700mA Max																																						
		Installation	Recessed																																						
		Adjustable	Horizontal360°/Vertial22°																																						
		Weight	0.06kg																																						
		Finish	YB/YW																																						
Remarks																																									
Accessory	/																																								
Image	/																																								
Code	/																																								
CCT	3000K																																								
CRI	CRI 92																																								
Beam	6°-30°																																								
Lumens	6°/30lm		30°/49lm																																						
IES	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>4144</td><td>0.07</td></tr><tr><td>1</td><td>1036</td><td>0.13</td></tr><tr><td>1.5</td><td>460</td><td>0.20</td></tr><tr><td>2</td><td>259</td><td>0.26</td></tr><tr><td>2.5</td><td>166</td><td>0.33</td></tr></table>		H(m)	E(lx)	D(m)	0.5	4144	0.07	1	1036	0.13	1.5	460	0.20	2	259	0.26	2.5	166	0.33	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>992</td><td>0.25</td></tr><tr><td>1</td><td>248</td><td>0.50</td></tr><tr><td>1.5</td><td>110</td><td>0.75</td></tr><tr><td>2</td><td>62</td><td>1.00</td></tr><tr><td>2.5</td><td>40</td><td>1.25</td></tr></table>			H(m)	E(lx)	D(m)	0.5	992	0.25	1	248	0.50	1.5	110	0.75	2	62	1.00	2.5	40	1.25
	H(m)	E(lx)	D(m)																																						
	0.5	4144	0.07																																						
	1	1036	0.13																																						
	1.5	460	0.20																																						
	2	259	0.26																																						
	2.5	166	0.33																																						
H(m)	E(lx)	D(m)																																							
0.5	992	0.25																																							
1	248	0.50																																							
1.5	110	0.75																																							
2	62	1.00																																							
2.5	40	1.25																																							
CCT	4000K																																								
CRI	CRI 92																																								
Beam	6°-30°																																								
Lumens	6°/35lm		30°/52lm																																						
IES	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>4840</td><td>0.07</td></tr><tr><td>1</td><td>1210</td><td>0.13</td></tr><tr><td>1.5</td><td>538</td><td>0.20</td></tr><tr><td>2</td><td>303</td><td>0.26</td></tr><tr><td>2.5</td><td>194</td><td>0.33</td></tr></table>		H(m)	E(lx)	D(m)	0.5	4840	0.07	1	1210	0.13	1.5	538	0.20	2	303	0.26	2.5	194	0.33	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1056</td><td>0.25</td></tr><tr><td>1</td><td>264</td><td>0.50</td></tr><tr><td>1.5</td><td>117</td><td>0.75</td></tr><tr><td>2</td><td>66</td><td>1.00</td></tr><tr><td>2.5</td><td>42</td><td>1.25</td></tr></table>			H(m)	E(lx)	D(m)	0.5	1056	0.25	1	264	0.50	1.5	117	0.75	2	66	1.00	2.5	42	1.25
	H(m)	E(lx)	D(m)																																						
	0.5	4840	0.07																																						
	1	1210	0.13																																						
	1.5	538	0.20																																						
	2	303	0.26																																						
	2.5	194	0.33																																						
H(m)	E(lx)	D(m)																																							
0.5	1056	0.25																																							
1	264	0.50																																							
1.5	117	0.75																																							
2	66	1.00																																							
2.5	42	1.25																																							






 		Code	MCD0103T-LS																																			
		Wattage	3W																																			
		Input Voltage	DC3V/700mA Max																																			
		Installation	Recessed																																			
		Adjustable	Horizontal360°/Vertial22°																																			
		Weight	0.06kg																																			
		Finish	YB/YW																																			
Remarks																																						
Accessory	/																																					
Image	/																																					
Code	/																																					
CCT	3000K																																					
CRI	CRI 92																																					
Beam	6°-30°																																					
Lumens	6°/30lm	30°/49lm																																				
IES	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>0.5</td><td>4144</td><td>0.07</td></tr><tr><td>1</td><td>1036</td><td>0.13</td></tr><tr><td>1.5</td><td>460</td><td>0.20</td></tr><tr><td>2</td><td>259</td><td>0.26</td></tr><tr><td>2.5</td><td>166</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	4144	0.07	1	1036	0.13	1.5	460	0.20	2	259	0.26	2.5	166	0.33	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>0.5</td><td>992</td><td>0.25</td></tr><tr><td>1</td><td>248</td><td>0.50</td></tr><tr><td>1.5</td><td>110</td><td>0.75</td></tr><tr><td>2</td><td>62</td><td>1.00</td></tr><tr><td>2.5</td><td>40</td><td>1.25</td></tr></table>	H(m)	E(lx)	D(m)	0.5	992	0.25	1	248	0.50	1.5	110	0.75	2	62	1.00	2.5	40	1.25
	H(m)	E(lx)	D(m)																																			
	0.5	4144	0.07																																			
	1	1036	0.13																																			
	1.5	460	0.20																																			
	2	259	0.26																																			
	2.5	166	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	992	0.25																																				
1	248	0.50																																				
1.5	110	0.75																																				
2	62	1.00																																				
2.5	40	1.25																																				
CCT	4000K																																					
CRI	CRI 92																																					
Beam	6°-30°																																					
Lumens	6°/35lm	30°/52lm																																				
IES	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>0.5</td><td>4840</td><td>0.07</td></tr><tr><td>1</td><td>1210</td><td>0.13</td></tr><tr><td>1.5</td><td>538</td><td>0.20</td></tr><tr><td>2</td><td>303</td><td>0.26</td></tr><tr><td>2.5</td><td>194</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	4840	0.07	1	1210	0.13	1.5	538	0.20	2	303	0.26	2.5	194	0.33	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>0.5</td><td>1056</td><td>0.25</td></tr><tr><td>1</td><td>264</td><td>0.50</td></tr><tr><td>1.5</td><td>117</td><td>0.75</td></tr><tr><td>2</td><td>66</td><td>1.00</td></tr><tr><td>2.5</td><td>42</td><td>1.25</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1056	0.25	1	264	0.50	1.5	117	0.75	2	66	1.00	2.5	42	1.25
	H(m)	E(lx)	D(m)																																			
	0.5	4840	0.07																																			
	1	1210	0.13																																			
	1.5	538	0.20																																			
	2	303	0.26																																			
	2.5	194	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1056	0.25																																				
1	264	0.50																																				
1.5	117	0.75																																				
2	66	1.00																																				
2.5	42	1.25																																				






 		Code	MCD0106T-TQ																																			
		Wattage	6W																																			
		input Voltage	DC12V/350mA Max																																			
		Installation	Recessed																																			
		Adjustable	Horizontal360°/ Vertial30°																																			
		Weight	0.12kg																																			
Finish		YB/YW																																				
Remarks																																						
Accessory	/																																					
Image	/																																					
Code	/																																					
CCT	3000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/72lm	40°/123lm																																				
IES	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>12756</td><td>0.07</td></tr><tr><td>1</td><td>3189</td><td>0.13</td></tr><tr><td>1.5</td><td>1417</td><td>0.20</td></tr><tr><td>2</td><td>797</td><td>0.26</td></tr><tr><td>2.5</td><td>510</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	12756	0.07	1	3189	0.13	1.5	1417	0.20	2	797	0.26	2.5	510	0.33	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1520</td><td>0.34</td></tr><tr><td>1</td><td>380</td><td>0.67</td></tr><tr><td>1.5</td><td>169</td><td>1.01</td></tr><tr><td>2</td><td>95</td><td>1.34</td></tr><tr><td>2.5</td><td>61</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1520	0.34	1	380	0.67	1.5	169	1.01	2	95	1.34	2.5	61	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	12756	0.07																																			
	1	3189	0.13																																			
	1.5	1417	0.20																																			
	2	797	0.26																																			
	2.5	510	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1520	0.34																																				
1	380	0.67																																				
1.5	169	1.01																																				
2	95	1.34																																				
2.5	61	1.68																																				
CCT	4000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/83lm	40°/152lm																																				
IES	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>13200</td><td>0.07</td></tr><tr><td>1</td><td>3300</td><td>0.13</td></tr><tr><td>1.5</td><td>1467</td><td>0.20</td></tr><tr><td>2</td><td>825</td><td>0.26</td></tr><tr><td>2.5</td><td>528</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	13200	0.07	1	3300	0.13	1.5	1467	0.20	2	825	0.26	2.5	528	0.33	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1864</td><td>0.34</td></tr><tr><td>1</td><td>466</td><td>0.67</td></tr><tr><td>1.5</td><td>207</td><td>1.01</td></tr><tr><td>2</td><td>117</td><td>1.34</td></tr><tr><td>2.5</td><td>75</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1864	0.34	1	466	0.67	1.5	207	1.01	2	117	1.34	2.5	75	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	13200	0.07																																			
	1	3300	0.13																																			
	1.5	1467	0.20																																			
	2	825	0.26																																			
	2.5	528	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1864	0.34																																				
1	466	0.67																																				
1.5	207	1.01																																				
2	117	1.34																																				
2.5	75	1.68																																				

 		Code	MCD0106T-LQ																																			
		Wattage	6W																																			
		input Voltage	DC12V/350mA Max																																			
		Installation	Recessed																																			
		Adjustable	Horizontal360°/ Vertial30°																																			
		Weight	0.12kg																																			
		Finish	YB/YW																																			
Remarks																																						
Accessory	/																																					
Image	/																																					
Code	/																																					
CCT	3000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/72lm	40°/123lm																																				
IES	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>12756</td><td>0.07</td></tr><tr><td>1</td><td>3189</td><td>0.13</td></tr><tr><td>1.5</td><td>1417</td><td>0.20</td></tr><tr><td>2</td><td>797</td><td>0.26</td></tr><tr><td>2.5</td><td>510</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	12756	0.07	1	3189	0.13	1.5	1417	0.20	2	797	0.26	2.5	510	0.33	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1520</td><td>0.34</td></tr><tr><td>1</td><td>380</td><td>0.67</td></tr><tr><td>1.5</td><td>169</td><td>1.01</td></tr><tr><td>2</td><td>95</td><td>1.34</td></tr><tr><td>2.5</td><td>61</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1520	0.34	1	380	0.67	1.5	169	1.01	2	95	1.34	2.5	61	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	12756	0.07																																			
	1	3189	0.13																																			
	1.5	1417	0.20																																			
	2	797	0.26																																			
	2.5	510	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1520	0.34																																				
1	380	0.67																																				
1.5	169	1.01																																				
2	95	1.34																																				
2.5	61	1.68																																				
CCT	4000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/83lm	40°/152lm																																				
IES	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>13200</td><td>0.07</td></tr><tr><td>1</td><td>3300</td><td>0.13</td></tr><tr><td>1.5</td><td>1467</td><td>0.20</td></tr><tr><td>2</td><td>825</td><td>0.26</td></tr><tr><td>2.5</td><td>528</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	13200	0.07	1	3300	0.13	1.5	1467	0.20	2	825	0.26	2.5	528	0.33	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1864</td><td>0.34</td></tr><tr><td>1</td><td>466</td><td>0.67</td></tr><tr><td>1.5</td><td>207</td><td>1.01</td></tr><tr><td>2</td><td>117</td><td>1.34</td></tr><tr><td>2.5</td><td>75</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1864	0.34	1	466	0.67	1.5	207	1.01	2	117	1.34	2.5	75	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	13200	0.07																																			
	1	3300	0.13																																			
	1.5	1467	0.20																																			
	2	825	0.26																																			
	2.5	528	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1864	0.34																																				
1	466	0.67																																				
1.5	207	1.01																																				
2	117	1.34																																				
2.5	75	1.68																																				

 		Code	MCD0106T-TH																																			
		Wattage	6W																																			
		Input Voltage	DC12V/350mA Max																																			
		Installation	Recessed																																			
		Adjustable	Horizontal360°/ Vertial30°																																			
		Weight	0.12kg																																			
		Finish	YB/YW																																			
Remarks																																						
Accessory	/																																					
Image	/																																					
Code	/																																					
CCT	3000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/72lm	40°/123lm																																				
IES	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>12756</td><td>0.07</td></tr><tr><td>1</td><td>3189</td><td>0.13</td></tr><tr><td>1.5</td><td>1417</td><td>0.20</td></tr><tr><td>2</td><td>797</td><td>0.26</td></tr><tr><td>2.5</td><td>510</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	12756	0.07	1	3189	0.13	1.5	1417	0.20	2	797	0.26	2.5	510	0.33	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1520</td><td>0.34</td></tr><tr><td>1</td><td>380</td><td>0.67</td></tr><tr><td>1.5</td><td>169</td><td>1.01</td></tr><tr><td>2</td><td>95</td><td>1.34</td></tr><tr><td>2.5</td><td>61</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1520	0.34	1	380	0.67	1.5	169	1.01	2	95	1.34	2.5	61	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	12756	0.07																																			
	1	3189	0.13																																			
	1.5	1417	0.20																																			
	2	797	0.26																																			
	2.5	510	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1520	0.34																																				
1	380	0.67																																				
1.5	169	1.01																																				
2	95	1.34																																				
2.5	61	1.68																																				
CCT	4000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/83lm	40°/152lm																																				
IES	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>13200</td><td>0.07</td></tr><tr><td>1</td><td>3300</td><td>0.13</td></tr><tr><td>1.5</td><td>1467</td><td>0.20</td></tr><tr><td>2</td><td>825</td><td>0.26</td></tr><tr><td>2.5</td><td>528</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	13200	0.07	1	3300	0.13	1.5	1467	0.20	2	825	0.26	2.5	528	0.33	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1864</td><td>0.34</td></tr><tr><td>1</td><td>466</td><td>0.67</td></tr><tr><td>1.5</td><td>207</td><td>1.01</td></tr><tr><td>2</td><td>117</td><td>1.34</td></tr><tr><td>2.5</td><td>75</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1864	0.34	1	466	0.67	1.5	207	1.01	2	117	1.34	2.5	75	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	13200	0.07																																			
	1	3300	0.13																																			
	1.5	1467	0.20																																			
	2	825	0.26																																			
	2.5	528	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1864	0.34																																				
1	466	0.67																																				
1.5	207	1.01																																				
2	117	1.34																																				
2.5	75	1.68																																				




 	Code	MCD0106T-LH																																				
	Wattage	6W																																				
	Input Voltage	DC12V/350mA Max																																				
	Installation	Recessed																																				
	Adjustable	Horizontal360°/ Vertial30°																																				
	Weight	0.12kg																																				
	Finish	YB/YW																																				
Remarks																																						
Accessory	/																																					
Image	/																																					
Code	/																																					
CCT	3000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/72lm	40°/123lm																																				
IES	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>0.5</td><td>12756</td><td>0.07</td></tr><tr><td>1</td><td>3189</td><td>0.13</td></tr><tr><td>1.5</td><td>1417</td><td>0.20</td></tr><tr><td>2</td><td>797</td><td>0.26</td></tr><tr><td>2.5</td><td>510</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	12756	0.07	1	3189	0.13	1.5	1417	0.20	2	797	0.26	2.5	510	0.33	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>0.5</td><td>1520</td><td>0.34</td></tr><tr><td>1</td><td>380</td><td>0.67</td></tr><tr><td>1.5</td><td>169</td><td>1.01</td></tr><tr><td>2</td><td>95</td><td>1.34</td></tr><tr><td>2.5</td><td>61</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1520	0.34	1	380	0.67	1.5	169	1.01	2	95	1.34	2.5	61	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	12756	0.07																																			
	1	3189	0.13																																			
	1.5	1417	0.20																																			
	2	797	0.26																																			
	2.5	510	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1520	0.34																																				
1	380	0.67																																				
1.5	169	1.01																																				
2	95	1.34																																				
2.5	61	1.68																																				
CCT	4000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/83lm	40°/152lm																																				
IES	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>0.5</td><td>13200</td><td>0.07</td></tr><tr><td>1</td><td>3300</td><td>0.13</td></tr><tr><td>1.5</td><td>1467</td><td>0.20</td></tr><tr><td>2</td><td>825</td><td>0.26</td></tr><tr><td>2.5</td><td>528</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	13200	0.07	1	3300	0.13	1.5	1467	0.20	2	825	0.26	2.5	528	0.33	<table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>0.5</td><td>1864</td><td>0.34</td></tr><tr><td>1</td><td>466</td><td>0.67</td></tr><tr><td>1.5</td><td>207</td><td>1.01</td></tr><tr><td>2</td><td>117</td><td>1.34</td></tr><tr><td>2.5</td><td>75</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1864	0.34	1	466	0.67	1.5	207	1.01	2	117	1.34	2.5	75	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	13200	0.07																																			
	1	3300	0.13																																			
	1.5	1467	0.20																																			
	2	825	0.26																																			
	2.5	528	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1864	0.34																																				
1	466	0.67																																				
1.5	207	1.01																																				
2	117	1.34																																				
2.5	75	1.68																																				

 		Code	MCD0106T-TS																																			
		Wattage	6W																																			
		Input Voltage	DC12V/350mA Max																																			
		Installation	Recessed																																			
		Adjustable	Horizontal360°/ Vertial30°																																			
		Weight	0.12kg																																			
Finish		YB/YW																																				
Remarks																																						
Accessory	/																																					
Image	/																																					
Code	/																																					
CCT	3000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/72lm	40°/123lm																																				
IES	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>12756</td><td>0.07</td></tr><tr><td>1</td><td>3189</td><td>0.13</td></tr><tr><td>1.5</td><td>1417</td><td>0.20</td></tr><tr><td>2</td><td>797</td><td>0.26</td></tr><tr><td>2.5</td><td>510</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	12756	0.07	1	3189	0.13	1.5	1417	0.20	2	797	0.26	2.5	510	0.33	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1520</td><td>0.34</td></tr><tr><td>1</td><td>380</td><td>0.67</td></tr><tr><td>1.5</td><td>169</td><td>1.01</td></tr><tr><td>2</td><td>95</td><td>1.34</td></tr><tr><td>2.5</td><td>61</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1520	0.34	1	380	0.67	1.5	169	1.01	2	95	1.34	2.5	61	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	12756	0.07																																			
	1	3189	0.13																																			
	1.5	1417	0.20																																			
	2	797	0.26																																			
	2.5	510	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1520	0.34																																				
1	380	0.67																																				
1.5	169	1.01																																				
2	95	1.34																																				
2.5	61	1.68																																				
CCT	4000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/83lm	40°/152lm																																				
IES	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>13200</td><td>0.07</td></tr><tr><td>1</td><td>3300</td><td>0.13</td></tr><tr><td>1.5</td><td>1467</td><td>0.20</td></tr><tr><td>2</td><td>825</td><td>0.26</td></tr><tr><td>2.5</td><td>528</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	13200	0.07	1	3300	0.13	1.5	1467	0.20	2	825	0.26	2.5	528	0.33	<table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1864</td><td>0.34</td></tr><tr><td>1</td><td>466</td><td>0.67</td></tr><tr><td>1.5</td><td>207</td><td>1.01</td></tr><tr><td>2</td><td>117</td><td>1.34</td></tr><tr><td>2.5</td><td>75</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1864	0.34	1	466	0.67	1.5	207	1.01	2	117	1.34	2.5	75	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	13200	0.07																																			
	1	3300	0.13																																			
	1.5	1467	0.20																																			
	2	825	0.26																																			
	2.5	528	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1864	0.34																																				
1	466	0.67																																				
1.5	207	1.01																																				
2	117	1.34																																				
2.5	75	1.68																																				

 		Code	MCD0106T-LS																																			
		Wattage	6W																																			
		Input Voltage	DC12V/350mA Max																																			
		Installation	Recessed																																			
		Adjustable	Horizontal360°/ Vertial30°																																			
		Weight	0.12kg																																			
		Finish	YB/YW																																			
Remarks																																						
Accessory	/																																					
Image	/																																					
Code	/																																					
CCT	3000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
Lumens	6°/72lm	40°/123lm																																				
IES	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>12756</td><td>0.07</td></tr><tr><td>1</td><td>3189</td><td>0.13</td></tr><tr><td>1.5</td><td>1417</td><td>0.20</td></tr><tr><td>2</td><td>797</td><td>0.26</td></tr><tr><td>2.5</td><td>510</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	12756	0.07	1	3189	0.13	1.5	1417	0.20	2	797	0.26	2.5	510	0.33	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1520</td><td>0.34</td></tr><tr><td>1</td><td>380</td><td>0.67</td></tr><tr><td>1.5</td><td>169</td><td>1.01</td></tr><tr><td>2</td><td>95</td><td>1.34</td></tr><tr><td>2.5</td><td>61</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1520	0.34	1	380	0.67	1.5	169	1.01	2	95	1.34	2.5	61	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	12756	0.07																																			
	1	3189	0.13																																			
	1.5	1417	0.20																																			
	2	797	0.26																																			
	2.5	510	0.33																																			
H(m)	E(lx)	D(m)																																				
0.5	1520	0.34																																				
1	380	0.67																																				
1.5	169	1.01																																				
2	95	1.34																																				
2.5	61	1.68																																				
CCT	4000K																																					
CRI	CRI 92																																					
Beam	6°-40°																																					
IES	6°/83lm	40°/152lm																																				
	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>13200</td><td>0.07</td></tr><tr><td>1</td><td>3300</td><td>0.13</td></tr><tr><td>1.5</td><td>1467</td><td>0.20</td></tr><tr><td>2</td><td>825</td><td>0.26</td></tr><tr><td>2.5</td><td>528</td><td>0.33</td></tr></table>	H(m)	E(lx)	D(m)	0.5	13200	0.07	1	3300	0.13	1.5	1467	0.20	2	825	0.26	2.5	528	0.33	 <table><tr><td>H(m)</td><td>E(lx)</td><td>D(m)</td></tr><tr><td>0.5</td><td>1864</td><td>0.34</td></tr><tr><td>1</td><td>466</td><td>0.67</td></tr><tr><td>1.5</td><td>207</td><td>1.01</td></tr><tr><td>2</td><td>117</td><td>1.34</td></tr><tr><td>2.5</td><td>75</td><td>1.68</td></tr></table>	H(m)	E(lx)	D(m)	0.5	1864	0.34	1	466	0.67	1.5	207	1.01	2	117	1.34	2.5	75	1.68
	H(m)	E(lx)	D(m)																																			
	0.5	13200	0.07																																			
	1	3300	0.13																																			
	1.5	1467	0.20																																			
	2	825	0.26																																			
2.5	528	0.33																																				
H(m)	E(lx)	D(m)																																				
0.5	1864	0.34																																				
1	466	0.67																																				
1.5	207	1.01																																				
2	117	1.34																																				
2.5	75	1.68																																				

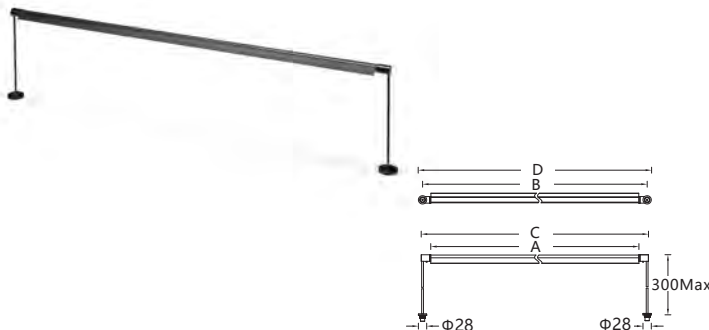






 		Code	MCD0110W
		Wattage	10W
		Input Voltage	DC24V
		Installation	Recessed
		Adjustable	/
		Weight	0.17kg
		Finish	MBK/MWT
Remarks			
Accessory	/		
Image	/		
Code	/		
CCT	3000K		
CRI	CRI 92		
Beam	Wallwash		
Lumens	441lm		
IES			
CCT	4000K		
CRI	CRI 92		
Beam	Wallwash		
Lumens	504lm		
IES			








		Code	MCG0120																															
		Wattage	20W/M																															
		Input Voltage	DC24V																															
		Installation	Surface mounted																															
		Adjustable	/																															
		Weight	0.57kg																															
		Finish	YB																															
Remarks	   																																	
Accessory	/																																	
Image	/																																	
Code	/																																	
CCT	3000K																																	
CRI	CRI 92																																	
Beam	110°																																	
Lumens	590lm																																	
IES	 <table><tr><th>H(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>251</td><td>0.60</td></tr><tr><td>2</td><td>63</td><td>5.20</td></tr><tr><td>3</td><td>28</td><td>7.80</td></tr><tr><td>4</td><td>16</td><td>10.40</td></tr><tr><td>5</td><td>10</td><td>13.00</td></tr></table>				H(m)	E(lx)	D(m)	1	251	0.60	2	63	5.20	3	28	7.80	4	16	10.40	5	10	13.00												
H(m)	E(lx)	D(m)																																
1	251	0.60																																
2	63	5.20																																
3	28	7.80																																
4	16	10.40																																
5	10	13.00																																
Dimension	<table><tr><th>Code</th><th>A</th><th>B</th><th>C</th><th>D</th></tr><tr><td>MCG0110</td><td>500</td><td>500</td><td>560</td><td>579</td></tr><tr><td>MCG0115</td><td>666</td><td>666</td><td>726</td><td>745</td></tr><tr><td>MCG0117</td><td>833</td><td>833</td><td>893</td><td>912</td></tr><tr><td>MCG0120</td><td>1000</td><td>1000</td><td>1060</td><td>1079</td></tr><tr><td>MCG0127</td><td>1333</td><td>1333</td><td>1393</td><td>1412</td></tr></table>				Code	A	B	C	D	MCG0110	500	500	560	579	MCG0115	666	666	726	745	MCG0117	833	833	893	912	MCG0120	1000	1000	1060	1079	MCG0127	1333	1333	1393	1412
Code	A	B	C	D																														
MCG0110	500	500	560	579																														
MCG0115	666	666	726	745																														
MCG0117	833	833	893	912																														
MCG0120	1000	1000	1060	1079																														
MCG0127	1333	1333	1393	1412																														





 	Product	Constant current dimming driver
	Code	CEC0650-1SL-D
	Wattage	3W
	Input Voltage	220-240V~50/60Hz
	Output Voltage	2.5-4V
	Output current	DC650mA
	Dimming type	0-10V dim
	PF	0.5
	Weight	40g
	Finish	BK


 	Product	Constant current dimming driver
	Code	CEC0350-4SL-D
	Wattage	5W
	Input Voltage	220-240V~50/60Hz
	Output Voltage	8-13V
	Output current	DC350mA
	Dimming type	0-10Vdim
	PF	0.5
	Weight	40g
	Finish	BK


 	Product	8-way constant current splitter
	Code	MDC0650-1-8L
	Wattage	3W*8
	Input Voltage	DC24V 1.5A
	Output Voltage	(2.5-4V)*8
	Output current	DC650mA
	Dimming type	0-10Vdim
	PF	0.5
	Weight	100g
	Finish	BK

 	Product	8-way constant current splitter
	Code	MDC0350-4-8L
	Wattage	5W*8
	Input Voltage	DC24V 2.5A
	Output Voltage	(8-13V)*8
	Output current	DC350mA
	Dimming type	0-10V dim
	PF	0.5
	Weight	100g
	Finish	BK

 	Product	Constant voltage driver
	Code	ME2500-24
	Wattage	Max60W
	Input Voltage	220-240V~50/60Hz
	Output Voltage	DC24V
	Output current	DC2.5A
	Dimming type	不調光
	PF	0.5
	Weight	168g
	Finish	BK

 	Product	0-10V dim constant voltage converter
	Code	ME5A-24V-D
	Wattage	Max60W
	Input Voltage	DC24V
	Output Voltage	DC24V
	Output current	DC5A
	Dimming type	0-10Vdim
	PF	0.5
	Weight	90g
	Finish	BK

 	Product	Low voltage track 0-10V dim constant voltage converter
	Code	ME2.5A-24V-D
	Wattage	Max60W
	Input Voltage	DC24V
	Output Voltage	DC24V
	Output current	DC2.5A
	Dimming type	0-10Vdim
	PF	0.5
	Weight	90g
	Finish	BK

 	Product	0-10V dimmer
	Code	MDC1-10V
	Wattage	/
	Input Voltage	/
	Output Voltage	/
	Output current	/
	Dimming type	/
	PF	/
	Weight	26g
	Finish	BK

